

DESCRIPTION AND INTENDED USE


Hore Modular LITE: In-the-ear (ITE) hearing aid style with modular faceplate, easy removable. Suitable for moderate and severe hearing loss.

Two (2) channels WDRC hearing aid, 12 adjusting bands (equalizers), 4 memories, automatic telecoil and MTO switching, feedback notch filter, low and high cut filters, output limiting.

FEATURES

- Powerful Dynamic Contrast Detection™ 2-Channel Compression
- 12-Band Gain Adjustment
- Trimmer Control Capability
- Program Switch Tones
- Low-level Expansion
- Battery Type: 10

FITTING RANGE

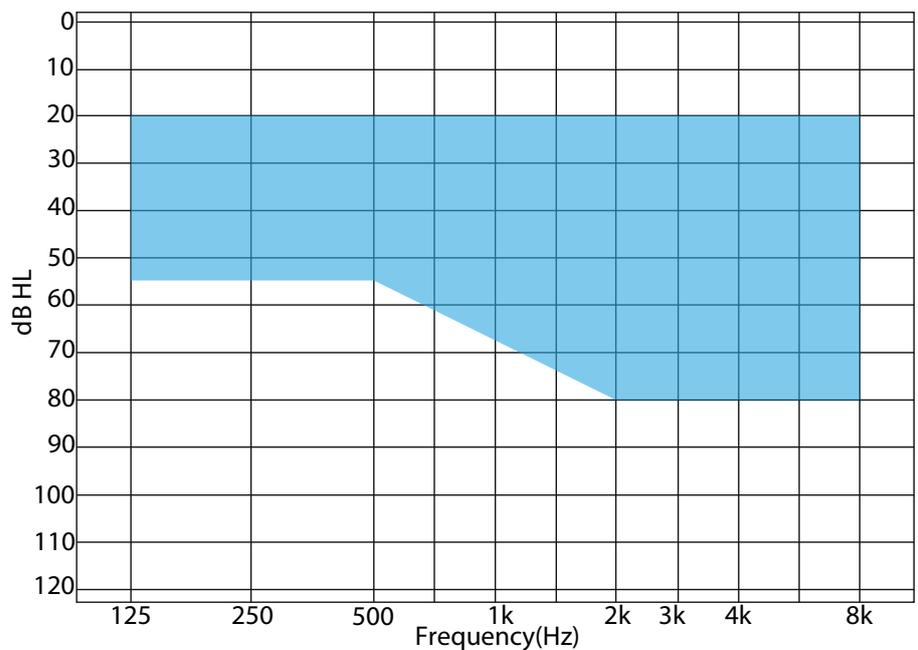

Technical data <i>Measured according to</i>		EAR SIMULATOR <i>IEC 60118-0:2015 and IEC 60318-5:2006</i>	2CC Coupler <i>ANSI S3.22-2014, IEC60118-7:2005 and IEC 60318-5:2006</i>
Horentek HORE Modular		LITE	LITE
Frequency range Hz		200/5300 Hz	200/5300 Hz
OSPL90	Peak Measurement	-	-
	Peak 500 Hz	126 dB	121 dB
	HFA AVERAGE	115 dB	110 dB
Full-on gain 50*	Peak Measurement	-	-
	Peak 500 Hz	63 dB	58 dB
	HFA AVERAGE	46 dB	41 dB
Reference test gain		32 dB	27 dB
Telecoil output (1600 Hz)	1 mA/m field 10 mA/m field SPLITS L/R	-	-
Total harmonic distortion (input 70 dB SPL)	500 Hz	< 2 %	< 2 %
	800 Hz	< 2 %	< 2 %
	1600 Hz	< 2 %	< 2 %
Equivalent input noise level		46 dB SPL	41 dB SPL
Battery consumption**	(Battery 10)Typical	0.66 mA	0.66 mA
Battery life, artificial measurements, hours ***		243	243

* Measured with the gain control of the hearing aid set to its full-on position minus 20dB and with an input SPL of 70 dB.
 ** Battery current is measured according to IEC 60118-0:2015 §7.7 after a settling time of a minimum of 3 minutes
 *** Based on the standardized battery consumption measurement. The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

Data may vary by more or less 5%



Ear simulator

LITE



2CC Coupler

LITE

OSPL90

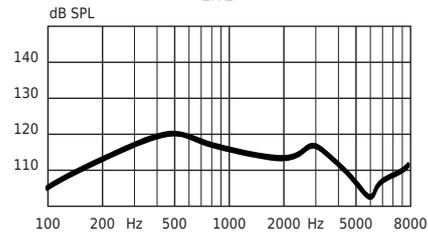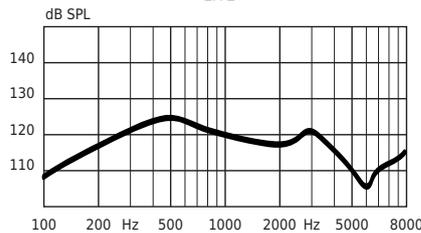

Full-on Gain

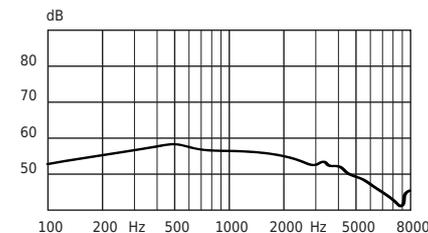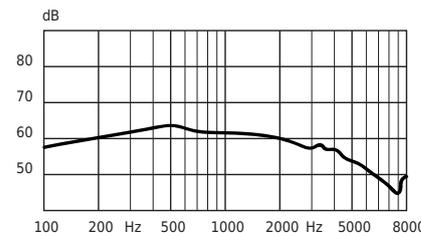

Frequency Response

